

HSF







SPECIFICATIONS:

Current Rating:1Amp
 Insulation Resistance:3000M ohms min
 Contact Resistance:20M ohms max
 Dielectric Withstanding:AC500V
 Operating Temperature:-45° C to +105° C
 Contact Material:Brass
 Insulator Material:PA6T, UL94V-0

Ordering Code:

PHJS01 - X - X - D - A-B - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contacts:
01 To 50
- ③ Contact Plating:
G0:Gold flash S0:Selective
G1:3U" Gold S1:Selective 3u"
G2:5u" Gold S2:Selective 5u"
G3:10u" Gold S3:Selective 10u"
G4:15u" Gold S4:Selective 15u"
G5:30u" Gold S5:Selective 30u"
SN:Tin
- ④ Connector Type
D:Double
- ⑤ Pin Length:
A: 0200=2.00mm
B: 0400=4.00mm
Please mark the desired length
in the A/C/B
- ⑥ Insulator Material:
B:PA6T
C:LCP
E:PA9T
- ⑦ Packing:
A:Tray
B:Bag
T:Tube
U:Tube+CAP
R:Tape&Reel
W:Tape&Reel+CAP
- ⑧ Plastic High:
H=2.5mm

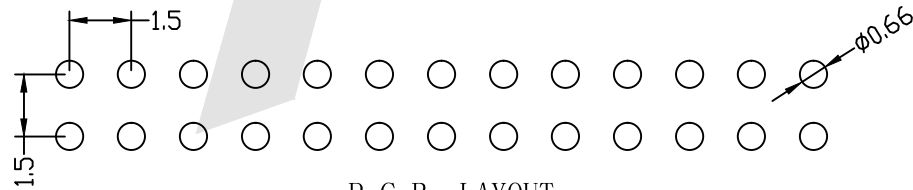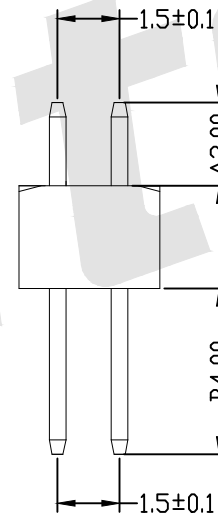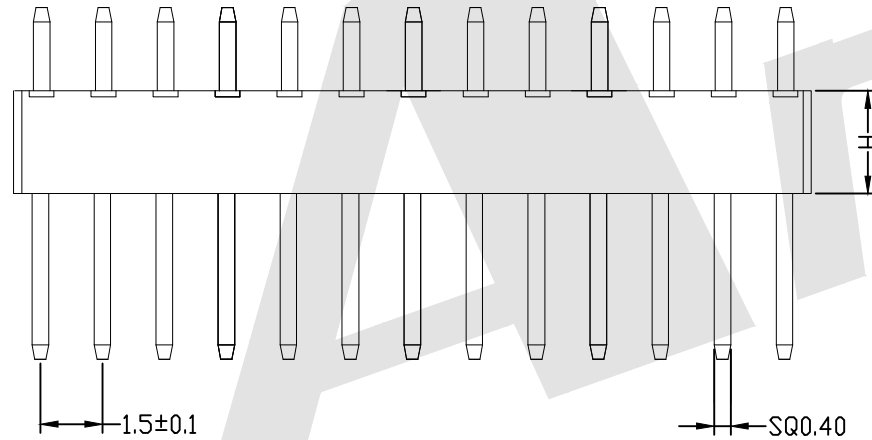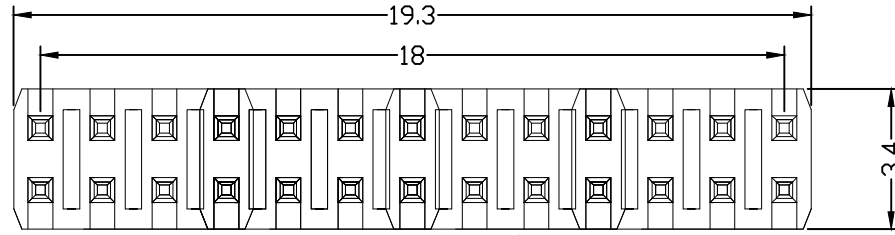

P. C. B LAYOUT

Standard IE P/N :		PHJS01-XXDXXXX	
A	B	Unless Otherwise specified tolerance	
2.0	4.0	X. ±0.35	X.XX: ±0.20
		X.X: ±0.25	X.XXX: ±0.15
Optional		SCALE: As Shown	UNIT: mm
		DRAW Wu Feng Rong	DATE 11/09/2019
		CHECK BobYang	DATE 11/09/2019

Antenk® ANTENK ELECTRONICS CO., LTD
 Http://www.antenk.com
 E-mail:sales@antenk.com

TITLE:
1.50mm Pin Header Straight Type Double Row

DRAWING NO: PHJS01-XXDXXXX

PRODUCT NO: PHJS01-XXDXXXX

REV	DESCRIPTION	DATE

