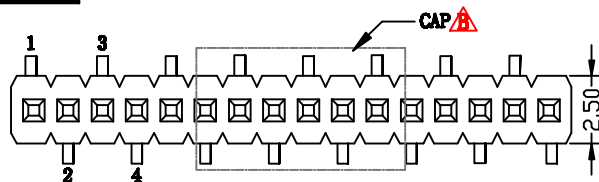


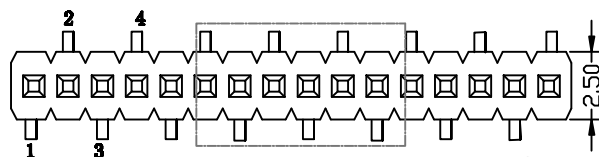
HSF



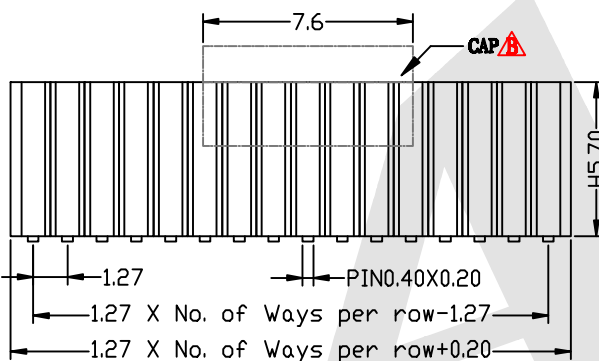
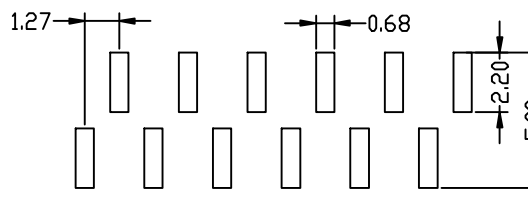

RoHS



TYPE A



TYPE B

TYPE A
PCB LAYOUTTYPE B
PCB LAYOUT

SPECIFICATION

Current Rating:	1Amp
Insulation Resistance:	1000M ohms min
Contact Resistance:	20M ohms max
Dielectric Withstanding:	AC500V
Operating Temperature:	-65°C to +125°C
Contact Material:	Brass
Insulator Material:	PA6T UL 94V-0 Black

Ordering Code:

FHCM04 - X - X - S - X - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
② No. of Contacts
01 To 50
③ Contact Plating:
G0: Gold flash S0: Selective
G1: 3U" Gold S1: Selective 3u"
G2: 5u" Gold S2: Selective 5u"
G3: 10u" Gold S3: Selective 10u"
G4: 15u" Gold S4: Selective 15u"
G5: 30u" Gold S5: Selective 30u"
SN: Tin
④ Connector Type
S: Single
⑤ Plastic High:
H: 5.7
Please mark the desired length in the H
- ⑥ Insulator Material
B: PA6T
C: LCP
E: PA9T
⑦ Packing
A: Tray
B: Bag
T: Tube
U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP
⑧ Special Function
A: Type A
B: Type B

Unless Otherwise specified tolerance

X. ±0.35 X.XX: ±0.20
X.X: ±0.25 X.XXX: ±0.15SCALE:
As ShownUNIT:
mmDRAW
YG ZHONGDATE
01/05/2016CHECK
BobYangDATE
01/05/2016ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail: sales@antenk.com

TITLE:

1.27mm Female Header Single Row SMT Type

DRAWING NO:

FHCM04-XXSXXXXX

PRODUCT NO:

FHCM04-XXSXXXXX



REV

CHANGE CAP
DESCRIPTION

2018.08.07

DATE