

HSF



RoHS



SPECIFICATION

Current Rating: 1.5 Amp
Insulation Resistance: 1000M ohms min
Contact Resistance: 20M ohms max
Dielectric Withstanding: AC500V
Operating Temperature: -65°C to +125°C
Contact Material: Brass
Insulator Material: PA6T,UL 94V-0 Black

Ordering Code:

PHDR07 - X - X - D - A-D1-D2-B - X - X - X
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
② No. of Contacts: 02 To 80
③ Contact Plating:
G0: Gold flash S0: Selective
G1: 3u" Gold S1: Selective 3u"
G2: 5u" Gold S2: Selective 5u"
G3: 10u" Gold S3: Selective 10u"
G4: 15u" Gold S4: Selective 15u"
G5: 30u" Gold S5: Selective 30u"
SN: Tin
④ Connector Type:
D: Dual
⑤ Pin Length:
A: 0400=4.00mm
D1: 0454=4.54mm
D2: 0275=2.75mm
B: 0280=2.80mm
Please mark the desired length in the A/D1/D2/B
⑥ Insulator Material:
A: PBT
B: PA6T
C: LCP
D: PA46
E: PA9T
⑦ Packing:
A: Tray
B: Bag
T: Tube
U: Tube+CAP
R: Tape&Reel
W: Tape&Reel+CAP
⑧ Plastic High:
H1: 1.5mm
H2: 2.0mm

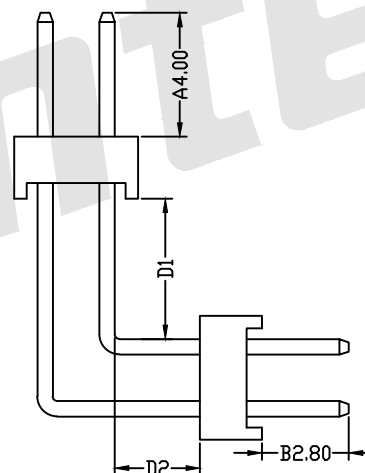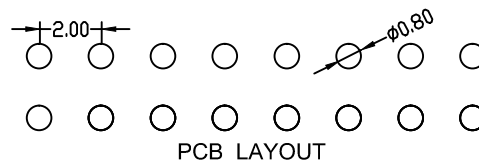


Standard IE P/N : PHDR07-10-G0-D-0400-0454-0275-0280-B-B-H1

A	D1	D2	B
4.00	4.54	2.75	2.80

Optional

SCALE: As Shown	UNIT: mm
DRAW YG ZHONG	DATE 01/05/2016
CHECK BobYang	DATE 01/05/2016





Antenk® ANTENK ELECTRONICS CO., LTD
Http://www.antenk.com
E-mail:sales@antenk.com

TITLE:
2.00mm Pin Header DualRow Double Plastic Angle Type

DRAWING NO: PHDR07-XXD-0400-0454-0275-0280-XXX

PRODUCT NO: PHDR07-XXD-0400-0454-0275-0280-XXX

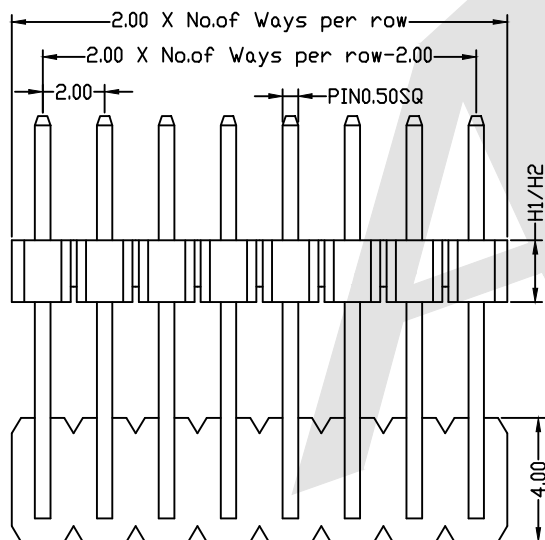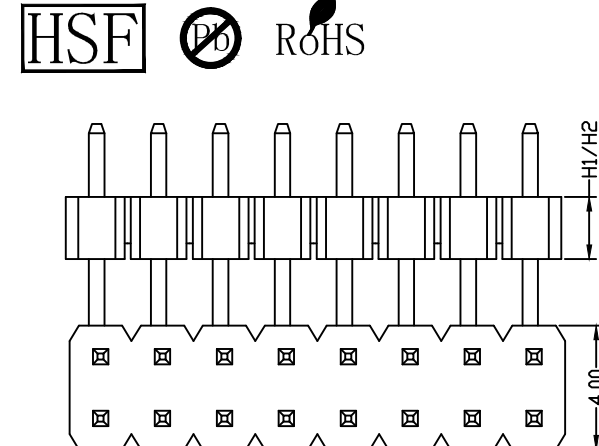

REV

Increase packing method and material

DESCRIPTION

2016/10/25

DATE