
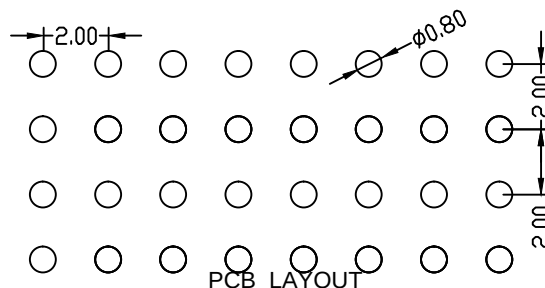


HSF

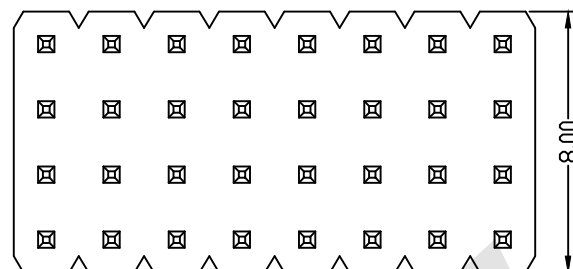



SPECIFICATION

Current Rating: 1.5 Amp
 Insulation Resistance: 1000M ohms min
 Contact Resistance: 20M ohms max
 Dielectric Withstanding: AC500V
 Operating Temperature: -65°C to +125°C
 Contact Material: Brass
 Insulator Material: PA6T,UL 94V-0 Black

Ordering Code:

PHDS10 - X - X - F - A-B - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
 ② No. of Contacts: 04 To 160
 ③ Contact Plating:
 G0: Gold flash S0: Selective
 G1: 3u" Gold S1: Selective 3u"
 G2: 5u" Gold S2: Selective 5u"
 G3: 10u" Gold S3: Selective 10u"
 G4: 15u" Gold S4: Selective 15u"
 G5: 30u" Gold S5: Selective 30u"
 SN: Tin
 ④ Connector Type: F: Four
 ⑤ Pin Length:
 A: 0400=4.00mm
 B: 0280=2.80mm
 Please mark the desired length in the A/B
- ⑥ Insulator Material:
 A: PBT
 B: PA6T
 C: LCP
 D: PA46
 E: PA9T
 ⑦ Packing:
 A: Tray
 B: Bag
 T: Tube
 U: Tube+CAP
 R: Tape&Reel
 W: Tape&Reel+CAP

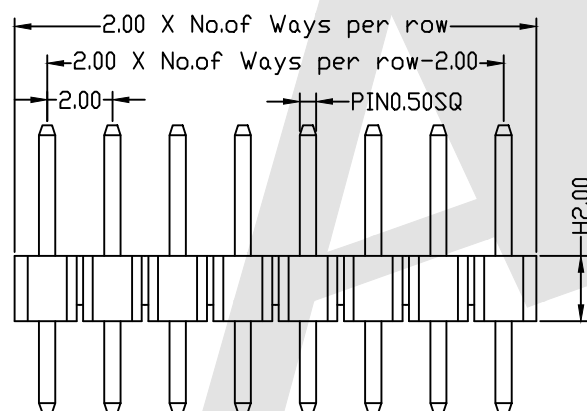


Standard IE P/N : PHDS10-10-G0-F-0400-0280-B-B

A	B	Unless Otherwise specified tolerance	
4.00	2.80	X. ±0.35	X.XX: ±0.20
		X.X: ±0.25	X.XXX: ±0.15
Optional		SCALE: As Shown	UNIT: mm



ANTENK ELECTRONICS CO., LTD
[Http://www.antenk.com](http://www.antenk.com)
 E-mail: sales@antenk.com

DRAW YG ZHONG
 CHECK BobYang
 DATE 01/05/2016



TITLE:
 2.00mm Pin Header Four Row Straight Type

DRAWING NO: PHDS10-XXF-0400-0280-XX
 PRODUCT NO: PHDS10-XXF-0400-0280-XX

REV
 DESCRIPTION

2016/10/25
 DATE

Increase packing method and material